


Typical Meter Box Installation

Not to Scale

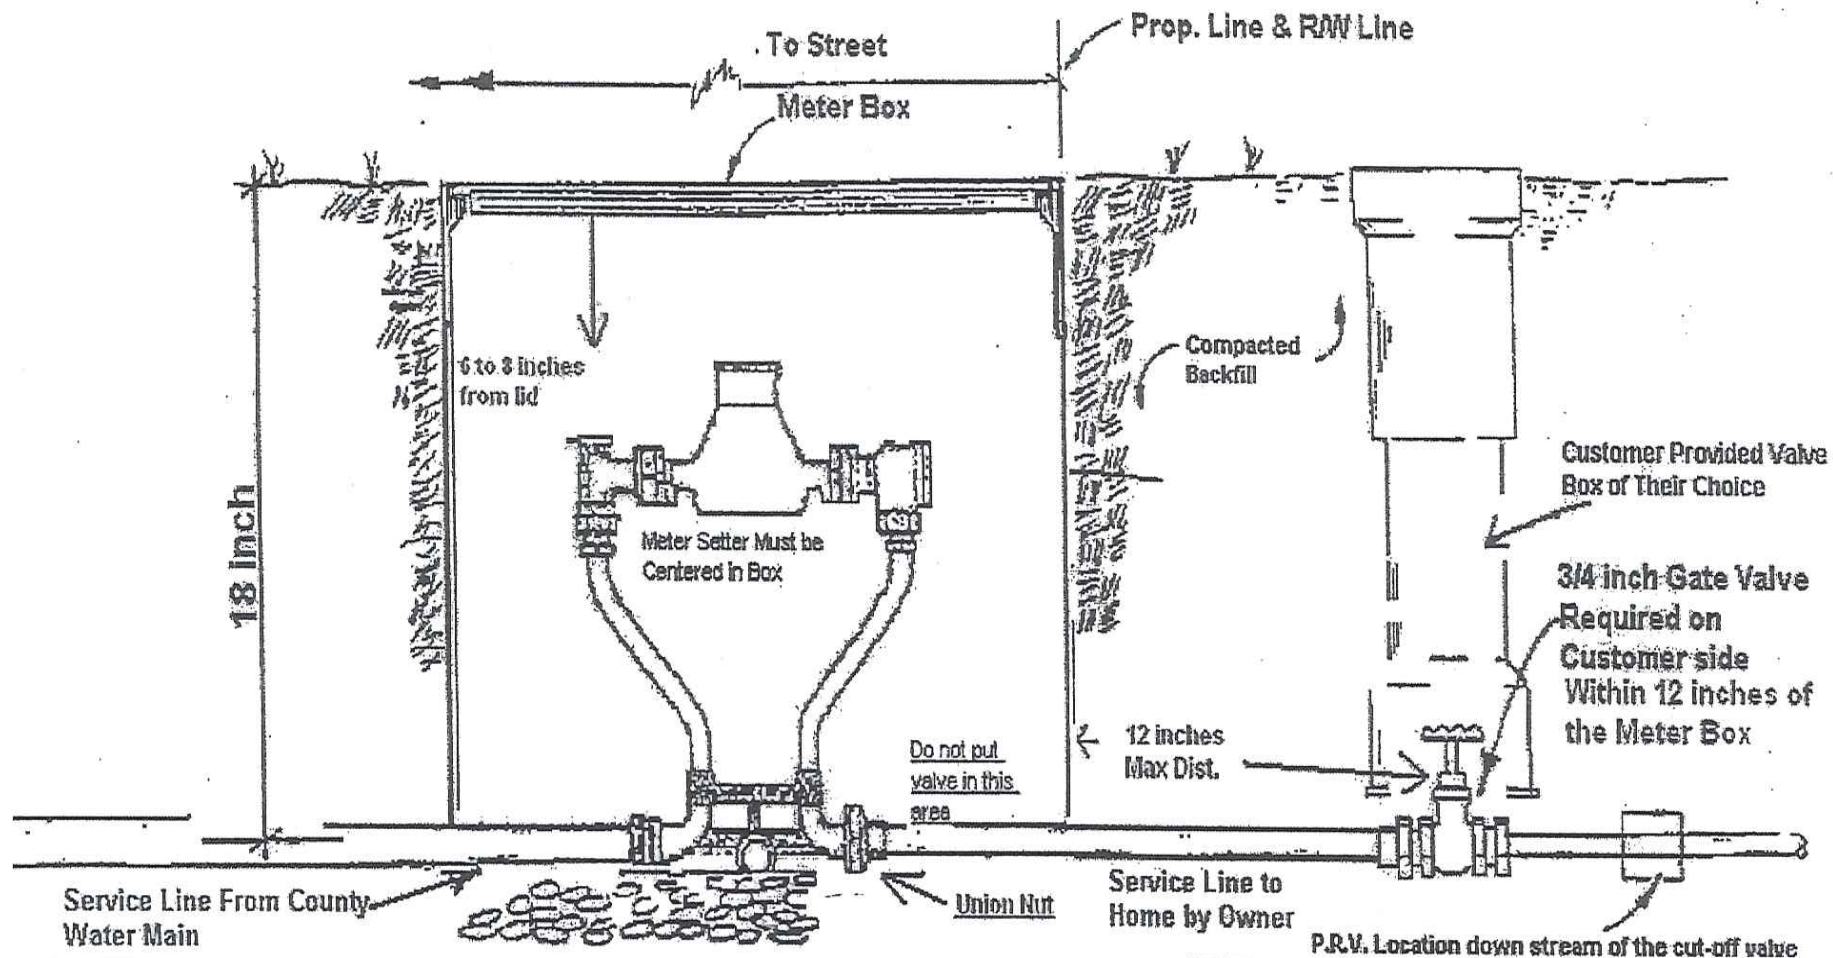

Cut-off valve requirement as specified in "Water and Sewer Districts Ordinance of the Public Utilities Division County of Cumberland, Section 10" Authorized By The Cumberland County Board of Commissioners.

- The meter will not be installed if the setter is not centered in the box, the setter has been pulled up on one end, the setter is laying on its side, the setter is too close to the box lid, the box is below grade or broken, the customers service line is not hooked to the union nut, the 3/4 gate valve has not been installed within 12 inches of the meter box.
- The meter box must have easy access at all times. Do not plant bushes within 4 feet of the meter box.
- Do not install a fence where the meter box will be inside.
- The customer is responsible for leaks at the union nut and their service line.
- Brass fittings are recommended for all connections to the County water system.

